



203CA 3/8B3/8BVLC

## 203CA SERIES INDUSTRIAL SOLENOID VALVES

The 203CA is a direct-acting, 2-way normally closed valve for air, water and steam applications.

### FEATURES

- Superior life with stainless steel enclosing tube
- Forged brass body with large wrench flats
- Repair kits available
- 3/8" NPT Solenoid Valve

### SPECIFICATIONS

Watts: ..... 12 AC  
 VA Inrush: ..... 37 for 5/32 & 1/8 orifices, 47 for 1/4 + orifices  
 VA Holding: ..... 19  
 Maximum working pressure: ..... 500 psi (35 bar)  
 Weight: ..... 1 lb. 4 oz.  
 UL/CUL file number: ..... MP604

### 203CA SERIES INDUSTRIAL SOLENOID VALVES




DESCRIPTION	PORT SIZE (IN)	CONNECTION SIZE	MOPD <sup>2</sup> AC	CV	MAX. AC FLUID TEMP. <sup>1</sup>	ELASTOMER	SUGGESTED COIL	MODEL NUMBER	ITEM NUMBER
Brass General Purpose	3/8	3/8"	10	1.7	180°F	Buna-N	AMG	203CA 3/8B3/8BVLC	030605

<sup>1</sup> With an ambient temperature of 77°F

<sup>2</sup> Maximum Operating Pressure Differential

VLC - See coil assemblies for availability

## EXPLODED VIEW & PARTS KIT DATA

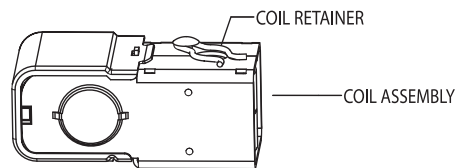

### VALVE REPAIR KIT

(K) indicates part is supplied in valve repair kit.

### 203CA COMPLETE VALVE REPAIR KITS

SEAT MATERIAL	MODEL NUMBER	ITEM NUMBER
Ethylene Propylene*	K-1106	040598

\* May also be used for Buna-n